

# **Product Information** Windscreen Repair System WSR-800 | GECKO

## **WSR-800**

Automated Windscreen Repair System, ProGlass WSR-800 for stationery use

#### **WSR-800K**

Automated Windscreen Repair System, ProGlass WSR-800 with case

The **WSR-800 GECKO** system is the highly-automated and userfriendly solution for perfect windscreen repairs.

In the latest **Generation 4** of the computer-controlled repair system, the electronics and software have been revised and improved once again. All work steps are integrated into an automatic programme. The new 5.0 inch colour display guides the operator and keeps him informed about the repair progress. **The process reliability realised in this way enables every employee to carry out a repair effortlessly and without errors - and always with optimal results.** 

- new 5.0 inch colour display
- improved electronic control
- optimised software

The repair fixture works with a two-chamber pressure/vaccum system. The outer chamber holds the fixture safely attached to the glass surface with a permanent vacuum. Through the inner chamber the glass damage is vacuumized, the resin injected and the chamber pressurized and vacuumized in several cycles. The UV lamp with high-power LEDs cures the repair completely in only 50 seconds.

NEW

FRSION

### Visit the GECKO website at www.gecko-repair.com!

#### International patent pending

quick link to the


website



© 2022 ProGlass GmbH



## **Product Information** Windscreen Repair System WSR-800 | GECKO

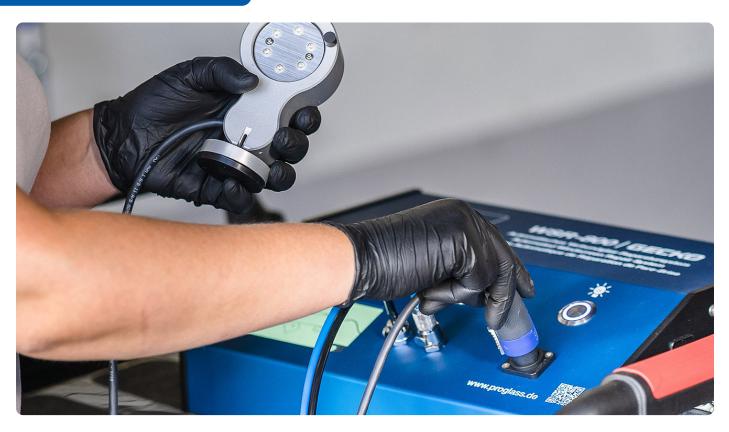

### Kit contains:

- ProGlass WSR-800 main unit (WSR-800-0) incl. power supply 230V
- ProGlass repair fixture (WSR-800-1)
- Tray for repair fixture (WSR-800-3)
- Connection Hose (WSR-800-4)
- UV lamp LED (UVN-806)
- Accessory box containing the following:
  - Carbide probe (CP-5040)
  - 1 repair resin 5 ml, acid-free (VR-505AF)
  - 1 pit filler resin 5 ml, acid-free (VR-405AF)
  - 20 Mylar squares (MR-300)
  - 10 scraper blades (RK-10)
- 1 glass repair polish, bottle of 25 ml (SP-025)
- LED lamp incl. batteries (PLE-160)
- Inspection Mirror Ø 80 mm with 3 time magnify & Vacuum cup (MC-800)
- Detailed instruction manual
- Rugged Plastic Case with rigidfoam lining, dimensions: 575 x 472 x 206 mm (only for WSR-800K)